


GRY 130mm 0,35mm² H05V2-K T90°
 BLK 130mm 0,35mm² H05V2-K T90°

INARCA TERMINAL (Cu Zn PRE-TIM)
 INARCA cod.0011060101 SEZIONE 0.25-0.75mm²
 INSULATING 1,9-3,3 (Cu Zn PRE-TIM)

UNIVERSAL MALE CONNECTOR 2WAY

Material: POLYAMID 6 or 66 V2 NO-FLAME GWT 750°C (PA V2 NF)
 Manufacturer: INARCA
 Denomination: UNIVERSAL MALE CONNECTOR 2WAY cod.0863052700

CABLE SIDE
LATO CAVI

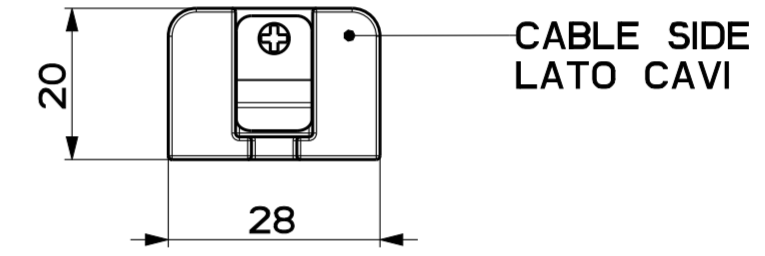

CABLE SIDE
LATO CAVI

TOLERANCE CLASSES		GENERAL TOLERANCE LINEAR DIMENSION							Created by Perelli, Francesco
ISO 2768-1		05-3	3-6	6-30	30-120	120-400	400-1000	1000-2000	
FINE	-	+0.05	+0.05	+0.1	+0.15	+0.2	+0.3	+0.5	
MEDIUM	X	+0.1	+0.1	+0.2	+0.3	+0.5	+0.8	+1.2	
COARSE	-	+0.2	+0.3	+0.5	+0.8	+1.2	+2	+3	
VERY COARSE	-	-	+0.5	+1	+1.5	+2.5	+4	+6	

These drawings and specifications are the property of Franke Technology and Trademark Ltd and shall not be reproduced, copied or transferred to any third party without the prior written permission of Franke Technology and Trademark Ltd, Switzerland. It is strictly prohibited to get quotes from the drawing or bring modifications whatsoever without the prior written consent of Franke Technology and Trademark Ltd.

Modification description		Doc.Type ASSEM	
ELECTRICAL SPECIFICATION TABLE REMOVED (CR-6899)		Approved by Bellucci, Daniele	
Denomination		Approval date 08-Sep-2021	
LED BAR L300x28 44Led 4000K 12V 3W NO COVER		Doc. status Released	
Material	Thickness	Weight	Drawing N. CME_771
		Kg 0.137	
Lang EN	Scale 1:1	Form A2	Rev 02
© Copyright Franke Technology and Trademark Ltd		Sheet 1/1	

